POWER YOUR FUTURE Weichai Generator LG550WP

6M33D670E200

Prime Power: 540KW/675KVA Standby Power: 594KW/742.5KVA

Weichai Baudouin Series 500KVA--42000KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations Reliable, robust and versatile generator.

Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer

transport and installation.

Reduced service & maintenance costs

Longer service intervals. Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

A SAFETY

Operate safely in accordance with proper operation manual.
 To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

FUAN LONGKAI POWER CO., LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China Tel:+86-0593-6309773 Fax:+86-0593-6586988 E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG550WP
Rated prime power	kva	675
Rated standard power	kva	742.5
Rated voltage line to line	V	400/230
Rated current	А	794
Maximun sound level	dB(@7m)	≤100

Engine-Weichai

Model	6M33D670E200			
Aspiration	Turbocha	Turbocharging and intercooling		
Fuel system	Mechanical P	Mechanical Pump+Electronic Speed Governor		
No. cylinders		6 in line		
Displacement	Liquid	19.6		
Bore*Stroke	mm	150*185		
Compression ratio		15:01		
Rated speed	r/min	1500		
Max power(with fan)	Kw	610		
Governor type		EFC Electrical		
Start Motor	V	24		

Exhause System		
Exhause gas flow	kg/h	4021.9
Exhause gas temp	°C	550
Max back pressure	kPa	7.5

Aspiration System

<3
20
/
3873.3

Fuel System		
100% load(Prime power)	L/h	134.3
75% load(Prime power)	L/h	/
50% load(Prime power)	L/h	/
Fuel tank capacity	L	1200

Lubrication System		
Oil capacity	L	61
Oil consumption	g/kwh	0.3
Oil pressure	kPa	400-650
(continuous operation)		

Cooling System

L	43.93
°C	80-92
°C	95
	C

Alternator			
Model	LONGKAI	LK544F	
	STAMFORD	HCI544F-S5L1D-F4/S5L1S-F4	
Phase		3	
Voltage	V	400/230	
Wiring Type	3 Ph	ase 4 wire, Y type	
Bearing		1	
Power factor		0.8	
Frequency	Hz	50	
Prime power	KW	536	
Exciter Type	Brushless, self-excitation		
Voltage regulation	%	±0.5	
Protection Grade		IP 23	
Insulation grade		H/H	
Altitude	m	≤1000	
Controller-DEEPSEA			
Model		DSE6120MK3	
Protective functions:			
Low oil pressure			
High water temperature			
High/low voltage			
High Engine Temperature and Overspeed.			
Voltage regulator frequency regulator			
Emergency stop			
Start failure			



Control Module Options

SmartGon Geneer Controller	InteliLite 9	ComAp
		TEST R Image Im
	<u></u> <u> </u> <u> </u>	
	1/0	1/0

Auto generator control module

- Control module with" Three Remote Control" functions
- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

LG550WP




Standard Features


Engine(Weichai Baudouin)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual

Options

optiono		
Battery charge		Ο
Engine heater		Ο
Alternator heater		Ο
PMG		Ο
Water oil separator		Ο
Daily fuel tank		\bigcirc
Remote control panel		\bigcirc
Automatic transfer switch/AT	S	Ο
Switch box		Ο
Standard: •	Options: o	

Unit Dimensions(Basic unit)

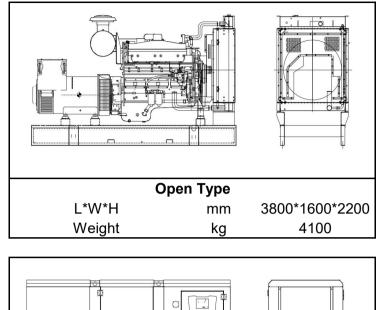

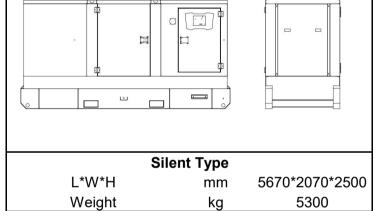

Warranty*

Weichai Engine

12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.